

# Thermostatic steam traps

## Type TKZ


Thermostatic steam traps type TKZ is made entirely from stainless steel. It's sealed in welded housing.

Compact design and small built in measures provide easy installation. We produce them for a nominal pressure PN25 PN16, with screw connection R1/2", R3/4" R1".

In addition to the standard version we have version of type TKZ with eccentrically offset connectors, as well as version with both internal threaded connection.

The TKZ type has installed thermal capsule, type TK. Depending on the requirements we can provide undercooling of condensate from 5 to 30° C.

TKZ type steam trap can be installed in any position. In the case of installation as shown on picture, on the system stop, condensate can leak out of steam trap so there is no danger of freezing. In the case of freezing up to -5°C there is no fracture of internal parts or the casing, so it is suitable for drainage and steam consumers who may be exposed to low temperatures.

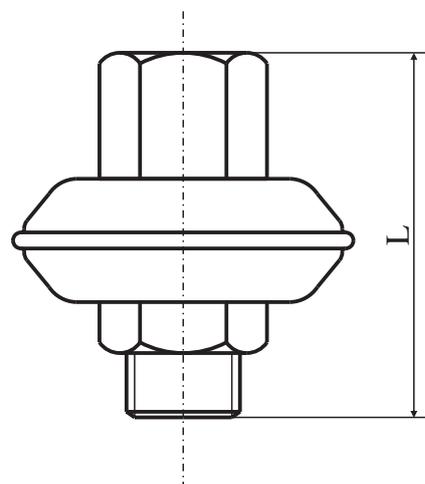

TKZ's housing is not retractable so it is not foreseen the possibility of replacing capsule.

This steam traps have the lowest price compared to other steam traps and a very long life time. Warranty for this type is two years.

Separator type is usually applied TKZ for the installation of steam heating, steam for outdoor drainage, ancillary heating. It also applies to consumers in small drainage prehrabenoj, chemical, petrochemical industry, etc.. They are good and the accompanying heating fuel oil and heating fuel oil tanks.

Odvajač tip TKZ se najčešće primenjuje za instalacije parnog grejanja, za spoljnu drenažu parovoda, prateće grejanje. Takođe se primenjuje za drenažu manjih potrošača u prehrabenoj, hemijskoj,

